
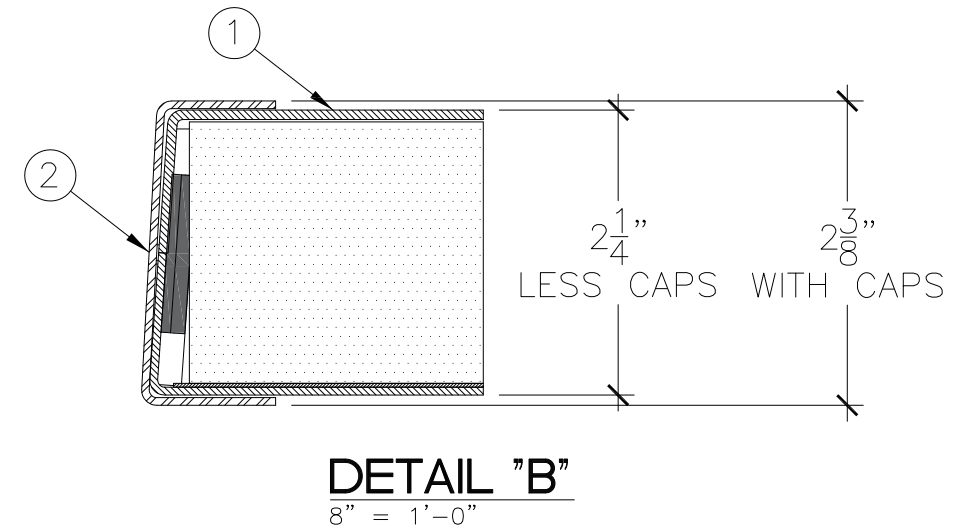
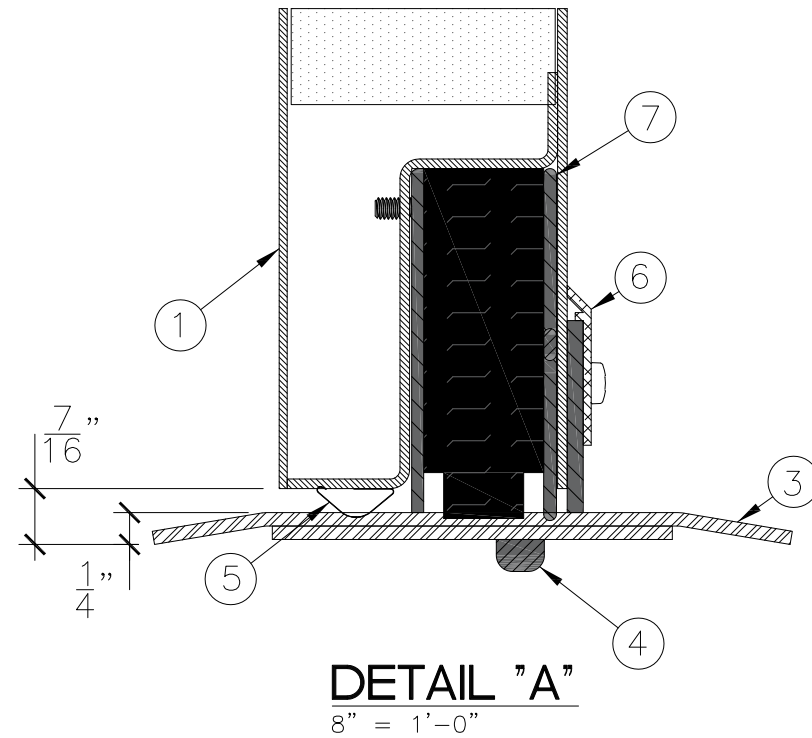


LEGEND:

1. GALVANNEAL DOOR.
2. STAINLESS STEEL EDGE CAPS.
3. 1/4" STAINLESS STEEL THRESHOLD SHIPPED LOOSE FOR INSTALLATION BY DOOR INSTALLER.
4. RF FOAM SEAL TO BE FIT AND APPLIED BY INSTALLER ON SITE.
5. ACOUSTIC & RF BRONZE SEAL TO BE FIT AND APPLIED BY INSTALLER ON SITE.
6. ACOUSTIC SWEEP SEAL TO BE FIT AND APPLIED BY INSTALLER AT SITE.
7. ACOUSTIC & RF MORTISED DOOR BOTTOM SEAL.

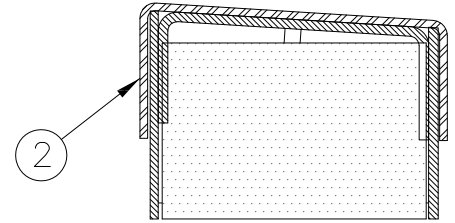

DRAWING TITLE:  
**STC50 AND 40dB RF-SHIELDED DOOR**

DATE: 2020/11/09  
DRAWN BY: ASC  
REVISION: 1