

APPLICATIONS:


- PETROCHEMICAL
- ANTI-TERRORISM

STANDARDS AND ANALYSIS METHOD:


- ASTM F2927 STANDARD TEST METHOD FOR GLAZING AND GLAZING SYSTEMS SUBJECT TO AIRBLAST LOADINGS.
- GLAZING LAYUP AND CONFIGURATION ANALYZED USING WINGARD SOFTWARE

NOTE:


- BLAST RESISTANCE IS A FUNCTION OF MULTIPLE VARIABLES. PLEASE CONSULT AMBICO FOR DETERMINATION OF A SUITABLE KIT AND GLAZING CONFIGURATION FOR THE APPLICATION.
- CUTOUT SIZE AND LOCATION WILL REQUIRE CONSULTATION WITH FACTORY TO ENSURE DESIGN ACCOMMODATES THE APPLICATION

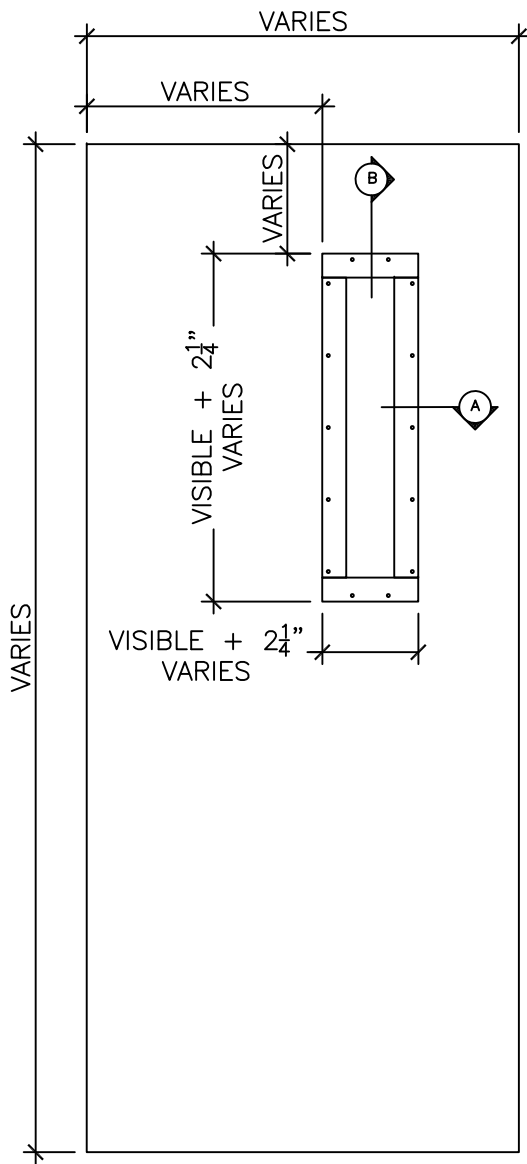

ELEVATION
3/4" = 1'-0"

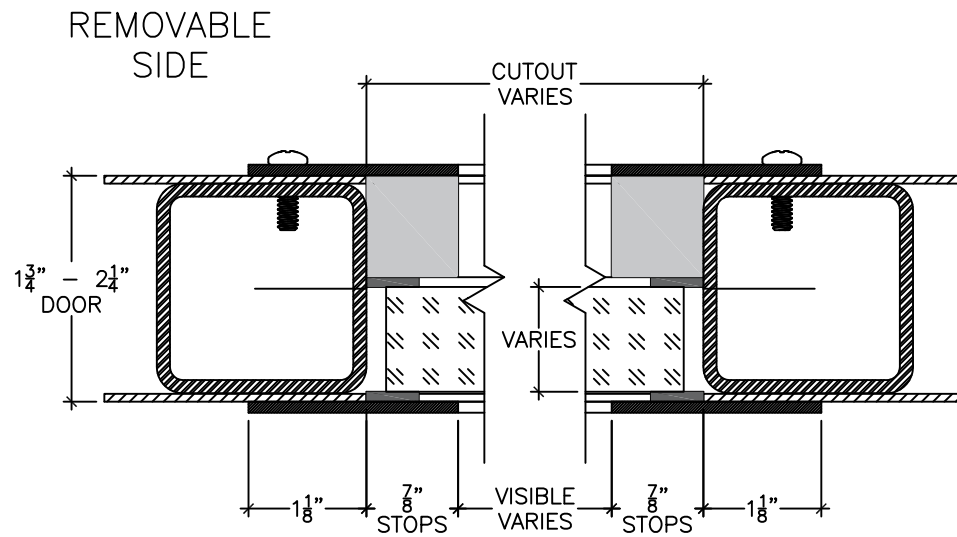

DETAIL "A"
8" = 1'-0"

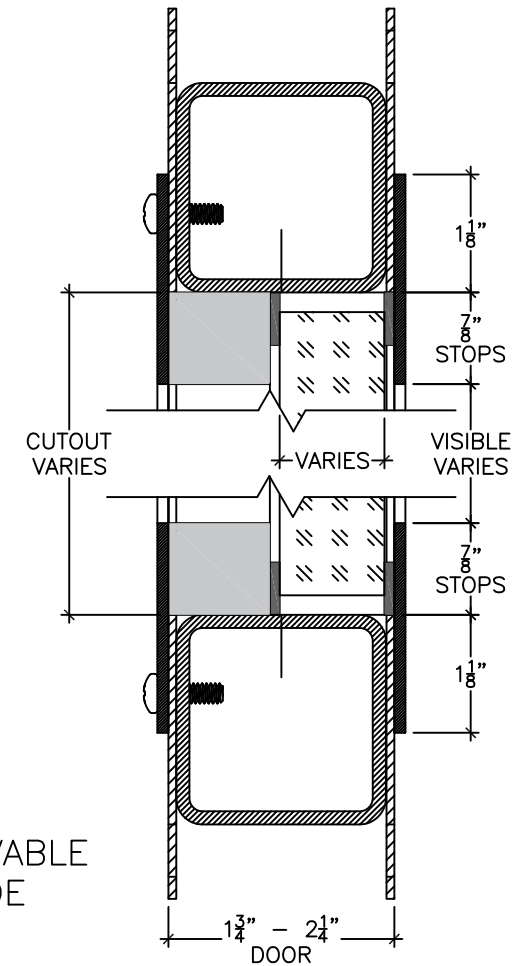

DETAIL "B"
8" = 1'-0"



DRAWING TITLE:

TYPICAL BLAST RESISTANT STEEL DOOR LITE KIT

DATE: 2021/02/03

DRAWN BY: ASC

REVISION: 1