



BULLET RESISTANT DOOR AND FRAME ASSEMBLY ORDER FORM INSTRUCTIONS

Items marked with an asterisk below are required for quotation purposes. All items must be filled out when placing an order.

1) General Information

- a) Fill out customer, contact, date, phone/fax/e-mail, address, ship to (same as address or job site), project name, quote required by, and project estimated delivery (guideline) at the top of the order form.*

2) Bullet Rating Information

- a) List “Bullet Rating” (see UL752 chart below)*

Rating	Ammunition	Grain	(g)	Minimum velocity fps (m/s)	Number of shots	Paragraph
Level 1	9 mm full metal copper jacket with lead core	124	8.0	1175 358	3	4.3
Level 2	.357 Magnum jacketed lead soft point	158	10.2	1250 381	3	4.4
Level 3	.44 Magnum lead semi-wadcutter gas checked	240	15.6	1350 411	3	4.5
Level 4	.30 caliber rifle lead core soft point	180	11.7	2540 774	1	4.6
Level 5	7.62 mm Rifle lead core full metal copper jacket	150	9.7	2750 838	1	4.7
Level 6	9 mm full metal copper jacket with lead core	124	8.0	1400 427	5	4.8
Level 7	5.56 mm Rifle full metal copper jacket with lead core	55	3.56	3080 939	5	4.9
Level 8	7.62 mm Rifle lead core full metal copper jacket	150	9.7	2750 838	5	4.10
Level 9	Armor piercing .30 caliber Rifle steel core lead point filler full metal jacket	166	10.8	2715 828	1	4.11
Level 10	.50 caliber rifle lead core full metal copper jacket military ball	709.5	45.9	2810 856	1	4.12


- b) List “Fire Rating” if fire rating performance required*
 - i) If fire rating performance required provide fire rating information.

3) Frame Information

- a) Rebate (Nominal Door) Dimensions
 - i) Enter “Rebate Width”*
 - ii) Enter “Rebate Height”* (**Note:** Frame must be installed at finished floor height. Do not embed in floor.)
- b)
 - i) Enter “Jamb Depth”*
 - ii) Enter “Wall Thickness”
 - iii) Enter “Head Face”
 - iv) Enter “Jamb Face”*
- c) Anchor Type
 - i) Check one of “Adjustable Masonry” or “Zee (Steel Stud)” or “Wood U Strap (Wood Stud)” or “T Anchor (Masonry)” or “P&D (Existing Masonry)” or Grant*

4) Door Information

- a) List quantity, door tag numbers, swings (LH, RH, LHR, RHR, LHA/RH, RHA/LH, LHRA/RH, RHRA/LH and etc.) and hardware set id(s) (**Note:** Use hardware form to fill out hardware information)*
 - i) See below swings information details for single or double doors:

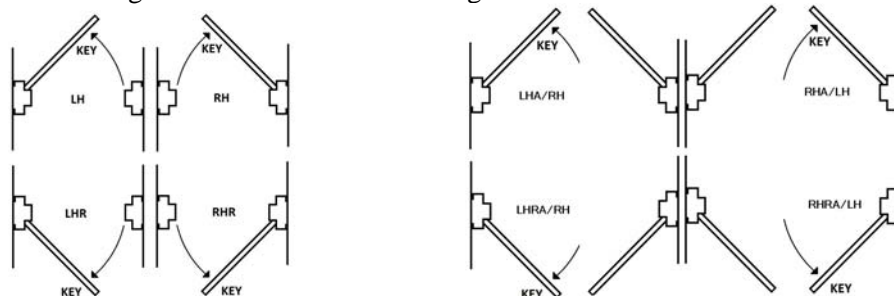

- b) List total quantity of doors per this order form (**Note:** the order form only applies to more than one door tag when multiple door tags are identical)*
- c) Check door(s) configuration “Single Leaf” or “Pair (one Active Leaf)” or “Pair (both Active Leaf)”*
- d) Check frame(s) configuration “3-sided” or “4-sided” or “other”
 - i) If frame(s) configuration is “other” include drawing
- e) Check door seating “Push” or “Pull”*
 - i) See below door seating information details.
- f) Check “Flush” or “Glazed”*
- g) Check done “by Ambico” or “by others”
 - i) If done by others provide specification sheet
- h) Check “Cutout” or “Clear Opening”*